




# Wireless Lapel Microphone Dual Channel - IS1002



Video Recording

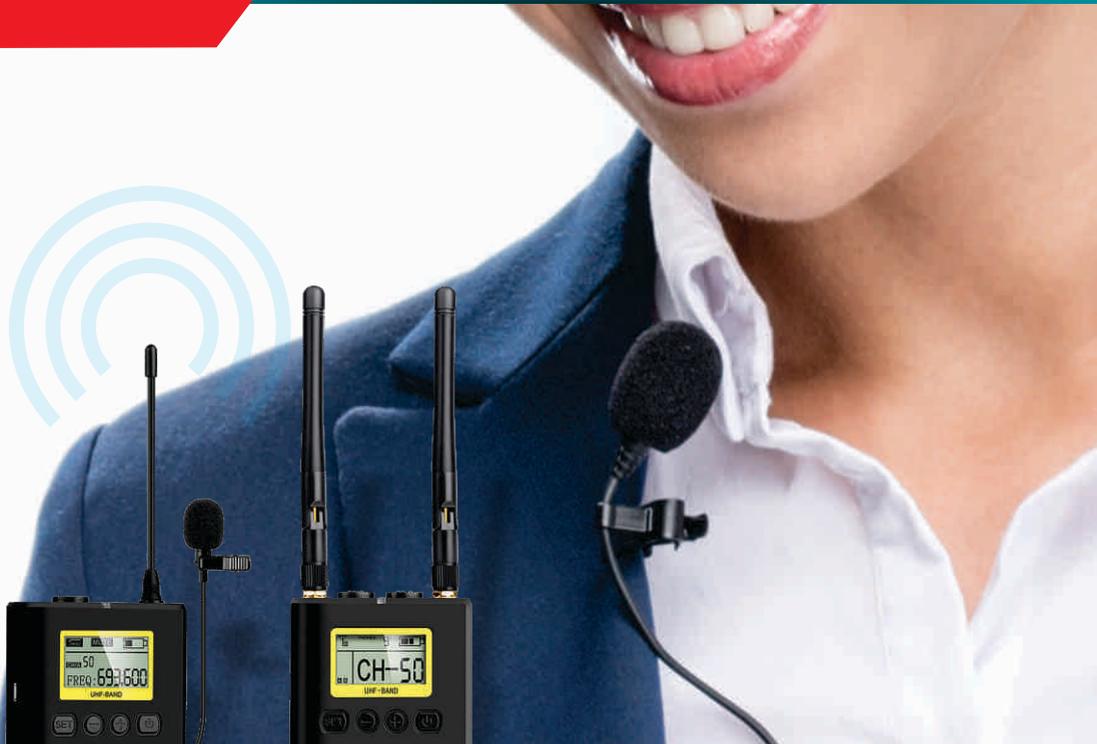

Camera recording



Audio Recording



No Noise



Usage Distance



No Interference



## IS1002 Technical Specs:

|  |                                      |
|--|--------------------------------------|
| <b>Frequency range</b>                       | 538 - 594MHz                         |
| <b>Modulation method</b>                     | F3E                                  |
| <b>Audio frequency response</b>              | 40Hz - 18 kHz                        |
| <b>Microphone type</b>                       | Capacitive omnidirectional           |
| <b>Number of channels</b>                    | 50                                   |
| <b>Frequency controller</b>                  | PLL Synthesizer                      |
| <b>Wireless transmission power</b>           | ≤10mW                                |
| <b>Signal to noise ratio</b>                 | >90dB                                |
| <b>Power Supply</b>                          | DC3V (2 x AA batteries not included) |
| <b>Battery life</b>                          | >10 hours                            |
| <b>Operating Range</b>                       | 100 meters                           |
| <b>Operating temperature</b>                 | 0° to 55° C                          |
| <b>Storage temperature</b>                   | -20°C to +55°C                       |
| <b>Receiver &amp; Transmitter Dimensions</b> | 89*63*22mm                           |
| <b>Receiver Unit Weight</b>                  | 80g                                  |
| <b>Transmitter Unit weight</b>               | 106g                                 |

Please visit our website to download a user manual for further information